

☐ UNCLASSIFIED ☐ INTERNAL USE ONLY ☐ CONFIDENTIAL ☒ SECRET

## ROUTING AND RECORD SHEET

SUBJECT: (Optional)

FROM:

C/TSD/EB

EXTENSION

NO

DATE

24 June 1964

TO: (Officer designation, room number, and building)

DATE

RECEIVED

FORWARDED

OFFICER'S INITIALS

COMMENTS (Number each comment to show from whom to whom. Draw a line across column after each comment.)

1.	C/WH/SA/MOB/PM GH4408 Hdqrs.			<i>CW</i>	<p>Bushnell 1.3 X phantom scopes are made in Japan - w/w distribution all have English marking</p> <p>2 to 2: 2 hrs <del>2 to 2</del> attached copy this is for your attention.</p> <p>file Amcasul seems like a book job trus. (W)</p>
2.	NA/SA/SC/RS			<i>W</i>	
3.	W/SA/ECB/Wannwright				
4.	<i>detu</i>				
5.					
6.					
7.					
8.					
9.					
10.					
11.					
12.					
13.					
14.					
15.					

FORM 3-62

610

USE PREVIOUS EDITIONS

☒ SECRET☐ CONFIDENTIAL☐ INTERNAL USE ONLY☐ UNCLASSIFIED

**SECRET**

24 June 1964

**MEMORANDUM FOR: C/WH/SA/MOB/PM****SUBJECT : Improved Sight for 7.62 Belgium (FAL) Rifle****REFERENCE : a) Memo for the Rcd. dated 25 May 64,  
Subject: "FAL Silencer/Sights", from  
C/WH/SA/MOB/PM**

1. In accordance with reference a) the following material is provided:

- a) Three open rear sight hoods for the subject rifle.
- b) Three copies of instructions for installing the sight and zeroing the rifle.
- c) Three tool kits containing an adjustment screw driver and two files.
- d) 400 rounds of improved underloaded ammunition with cream of wheat filler. (Boxes marked with red strip. These should be substituted for the rounds already delivered).

2. It must be understood that the limited time available would not permit more than cursory acceptance testing and the superiority of this sight over the standard unit has not been definitely established.


3. The scope and mount requested in reference a) proved to be an unfeasible development in the time available. A mount could not be devised which was interchangeable with any FAL without extensive modification to the weapon.

4. For additional information regarding this matter contact   or D. R. Dunn on extension 3319.

*Walter L. Erhardt*  
**WALTER L. ERHARDT**  
Chief

**TSD/Engineering Branch****Attachments: As Stated****Distribution:**

- 1 - Addressee
- 1 - TSD/SDB
- 1 - C/TSD
- 1 - EB-81J

**SECRET**

**SNAP-ON SIGHT HOOD FOR  
THE 7.62 BELGIUM (FAL) RIFLE**


1. The sight hood snaps over the existing rear sight on the 7.62 Belgium (FAL) rifle. It is designed to raise the rear sight to compensate for the more curving trajectory of the underloaded ammunition and is an open sight for increased night sighting capability.

2. The sight hood is oriented with the three screws facing the muzzle end of the rifle (See attached drawings). Press down on the hood until the ball detent snaps into the peep hole


3. The slot for the existing rear sight is made tight so that the hood will fit firmly in place. If it fails to fit, file the existing rear sight as necessary. If the sight fits the slot but is difficult to snap on and off, or is too loose, adjust the ball detent by turning the center set screw on the sight hood.

4. The weapon must be zeroed on a known distance firing range to determine the sight settings and proper sight picture for standard and underloaded ammunition when using the hood. The only adjustments possible are those already on the rifle. (That is, elevation control using the graduated ramp and windage control by adjustment of the two locking screws at the base of the existing rear sight dovetail.)

**NOTE:** It is very important to hold the rifle the same way each time so that the relation of the eye to the rear sight remains constant. The user must determine his own zero for each rifle and hood combination and maximum effective range for each ammunition type.

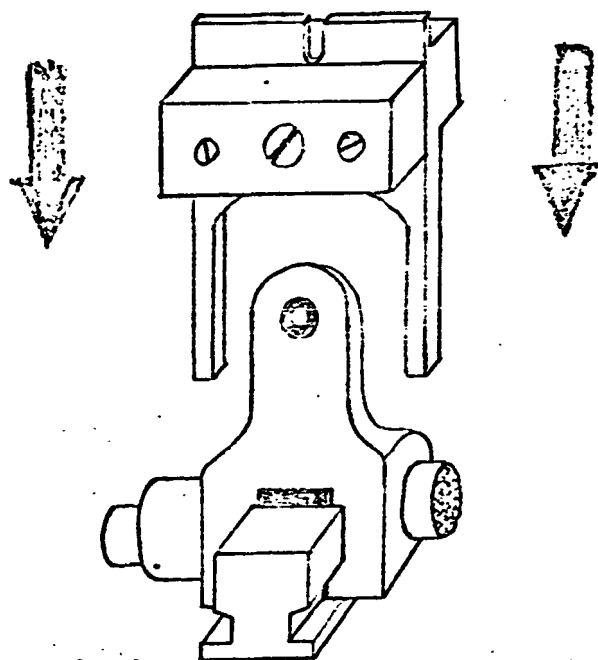

FRONT VIEW

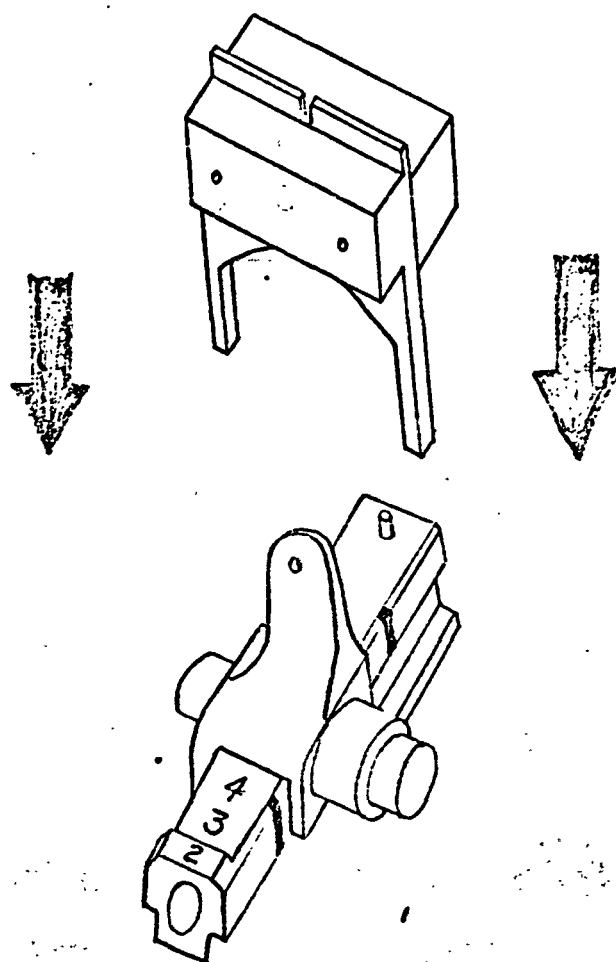

REAR VIEW